


AD-A242 338



2

TECHNICAL REPORT BRL-TR-3257

**BRL**

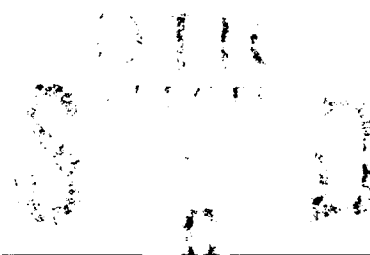

ANALYSIS OF RAM ACCELERATION  
FOR HIGH VELOCITY APPLICATIONS

DAVID L. KRUCZYNSKI

AUGUST 1991

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

U.S. ARMY LABORATORY COMMAND

BALLISTIC RESEARCH LABORATORY  
ABERDEEN PROVING GROUND, MARYLAND

91-15299



91 028

## **NOTICES**

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

# UNCLASSIFIED

<b>REPORT DOCUMENT PAGE</b>			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE <b>August 1991</b>	3. REPORT TYPE AND DATES COVERED Final 15 Jul 90 - 15 July 91		
4. TITLE AND SUBTITLE Analysis of Ram Acceleration for High Velocity Applications		5. FUNDING NUMBERS PR: 1L162618AH80		
6. AUTHOR(S) David L. Kruczynski		8. PERFORMING ORGANIZATION REPORT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)				
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) USA Ballistic Research Laboratory ATTN: SLCBR-DD-T Aberdeen Proving Ground, MD 21005-5066		10. SPONSORING/MONITORING AGENCY REPORT NUMBER  <b>BRL-TR-3257</b>		
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Ram acceleration is an emerging propulsion technology which appears capable of producing very high velocities with significant masses. Work at the University of Washington has demonstrated velocities in excess of 2.6 km/s in 38-mm caliber, while theory predicts velocities in excess of 10 km/s may be obtainable. Following a brief introduction to the theory of ram acceleration, advantages and disadvantages of the technology for large caliber hypervelocity applications are examined. An empirical performance analysis of a scaled-up ram accelerator (120-mm) is presented and compared to a theoretical analysis of conventional solid propulsion. A theoretical and experimental program ongoing at the Ballistic Research Laboratory to explore scaling the technology to 120-mm is then described.				
14. SUBJECT TERMS Ram Acceleration, Hybrid Propulsion, Hypervelocity Propulsion, Hypervelocity, HIRAM Laboratory Launcher, High Velocity			15. NUMBER OF PAGES <b>28</b>	
17. SECURITY CLASSIFICATION OF REPORT  UNCLASSIFIED			16. PRICE CODE	
			20. LIMITATION OF ABSTRACT  SAR	
18. SECURITY CLASSIFICATION OF THIS PAGE  UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT  UNCLASSIFIED			

INTENTIONALLY LEFT BLANK.

# TABLE OF CONTENTS

NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A-1	

	Page
List of Figures .....	v
List of Tables .....	vi
ACKNOWLEDGMENTS .....	vii
1. BACKGROUND .....	1
2. ADVANTAGES AND DISADVANTAGES OF RAM ACCELERATOR PRO- PULSION FOR LARGE CALIBER APPLICATIONS .....	2
2.1. Advantages .....	2
2.1.1. Propulsive Efficiencies .....	2
2.1.2. Pre- and Post-Combustion Pressure Relationship .....	4
2.1.3. Readily Available and Easily Tailored Fuel/Oxidizer .....	4
2.1.4. Performance Potential .....	5
2.1.5. Projectile Acceleration and Tube Recoil .....	5
2.2. Disadvantages .....	5
2.2.1. Preaccelerator Required .....	5
2.2.2. Projectile Subcaliber by Nature .....	6
2.2.3. Accelerator End Sealing Required .....	6
2.2.4. Concept Unproven Beyond 3 km/s .....	6
3. ACCELERATOR PERFORMANCE SUMMARY .....	7
4. POTENTIAL USES OF A RAM ACCELERATOR .....	8
4.1. The Ram Accelerator as a Research Tool .....	8
4.2. The Ram Accelerator as a Weapon .....	8
5. HYBRID INBORE RAM (HIRAM) ACCELERATOR PROGRAM .....	9
6. CLOSING REMARKS .....	10
7. REFERENCES .....	11
DISTRIBUTION LIST .....	15

INTENTIONALLY LEFT BLANK.

## LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. Qualitative Plots of Pressure, Temperature, and Velocity for Flow Around a Ramjet Engine Centerbody in Supersonic Flow. ....	1
2. Qualitative Plots of Pressure, Temperature, and Velocity for Flow Around a Ram Accelerator Projectile in Supersonic Flow With Subsonic, Thermally Choked Combustion .....	2
3. Qualitative Plots of Pressure, Temperature, and Velocity for Flow Around a Ram Accelerator Projectile in Supersonic Flow With Supersonic, Oblique Detonation Wave Combustion .....	2
4. Plot Of Breech, Tube, and Projectile Base Pressure Relationships for a Conventional Solid Propulsion Cycle .....	3
5. Typical Pressure, Magnetic Sensor (EM), and Luminosity Data From Thermally Choked Ram Accelerator Combustion .....	3
6. Effective Pressure Distribution on a Ram Projectile Operating in the Subsonic-Combustion, Thermally Choked, Mode .....	4
7. Plot of Pre- and Post-Combustion Pressure Ratios for Several Pressurizations in $2.7 \text{ CH}_4 + 2\text{O}_2 + 5.8\text{N}_2$ Fuel/Oxidizer/Diluent Mixtures With Approximately Same Mass Projectiles .....	4
8. Rear View of Projectile in Gun Tube Showing Diametric Clearance Between Projectile and Tube Walls .....	6
9. Schematic of Ram Accelerator End Sealing .....	6
10. Thrust Coefficient vs. Projectile Velocity for Several Fuel/Oxidizer/Diluent Mixtures .....	7
11. Velocity Versus Travel for Conventional Solid and Ram Accelerator Propulsion .....	8
12. 120-mm Hybrid Inbore Ram (HIRAM) Projectile Contrasted With 38-mm University of Washington Projectile .....	9

13. 120-mm Hybrid Inbore Ram (HIRAM) Cartridge .....	10
14. Overhead View of 120-mm Hybrid Inbore Ram (HIRAM) Test Facility Under Construction at the Ballistic Research Laboratory .....	10

## LIST OF TABLES

<u>Table</u>	<u>Page</u>
1. Properties of Gas Fuel/Oxidizer Mixtures for Ram Acceleration .....	5
2. Potential Applications of a Large Caliber Ram Accelerator .....	9



## ACKNOWLEDGEMENTS

The author wishes to thank Mr. Ronald Anderson of the Ballistic Research Laboratory for his assistance in preparing the IBHVG2 data used in this report. Appreciation is also extended to Professor Adam Bruckner and the University of Washington's Aerospace and Energetics Research Program for use of and assistance in preparing data for this report. The author also wishes to thank Ms. Karen Marcou for assistance in the preparation of this manuscript.


INTENTIONALLY LEFT BLANK.

## 1. BACKGROUND

The University of Washington (UW) has pioneered inbore ram acceleration technology. While a detailed understanding of the fundamental physics and process involved is available in references (Hertzberg, Bruckner, and Bogdanoff 1986, 1988, 1987; Knowlen, Brucker, and Bogdanoff 1987; Bruckner and Hertzberg 1987; Bruckner et al. 1988a, 1988b; Kaloupis and Bruckner 1988; Bruckner, Hertzberg, and Knowlen, to be published), a brief summary of the ram process follows. Ram acceleration is related to the better known supersonic ramjet aircraft/rocket engine process. As schematically shown in Figure 1, a supersonic ramjet engine consists of an outer engine cowling (1), a centerbody (diffuser) (2), and fuel injectors and flame holders (3). In operation, air entering the engine at supersonic speeds is compressed and slowed in the inlet/supersonic diffuser while undergoing one or more oblique shocks resulting in a weak normal shock over the subsonic diffuser section. Behind this normal shock air is further compressed, then fuel is introduced into a subsonic combustion zone. The heated air/fuel products are then expanded in the exhaust nozzle lowering their static pressure as the gas velocity increases, resulting in a net forward thrust on the engine. Figure 1 shows qualitative plots of the static pressure, temperature, and velocity profiles throughout the ramjet engine.

In the inbore ram accelerator of Figure 2, a gun barrel-like tube replaces the cowling (1), the centerbody is replaced by a similarly shaped projectile (2), and the fuel injection process is replaced by a pressurized gas (fuel/oxidizer/diluent) mixture filling the gun tube

(3). In operation the projectile enters the pre-fueled tube at a velocity substantially above the fuel/oxidizer/diluent sound speed. A complex series of oblique shocks occur which approach a normal shock structure behind the throat (projectile maximum diameter). A subsonic combustion zone is established behind this normal shock. Heat released in this zone creates thermal choking at a location downstream of the projectile. This thermal choking stabilizes the shock system and high pressure field on the projectile resulting in forward thrust on the projectile.

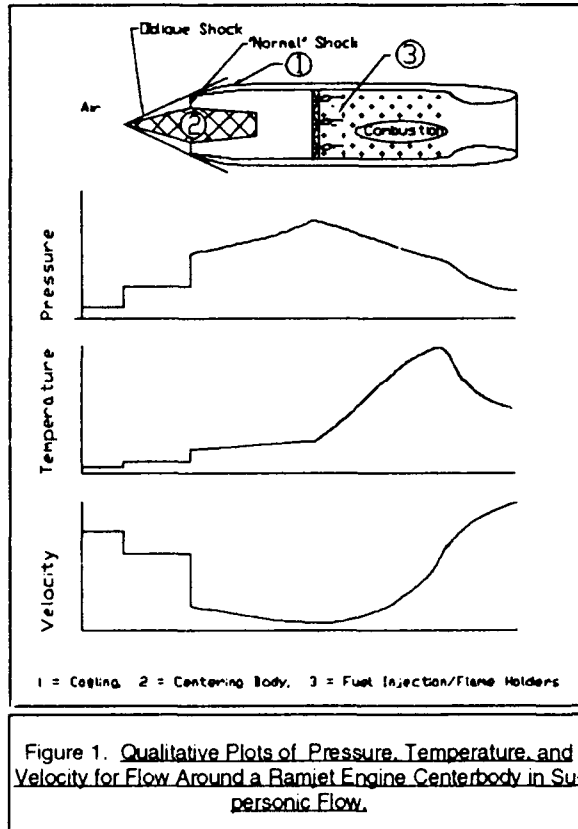

At velocities above 3 km/s the ram projectile may proceed through several combustion regimes. These include, but are not limited to, mixed sub/supersonic combustion and fully supersonic mechanisms such as Oblique Detonation Wave (ODW) propulsion (Yungster, Eberhardt, and Bruckner 1989; Yungster and Bruckner 1989; Ostrander et al. 1987; Pratt, Humphrey, and Glenn 1987; Kull et al.

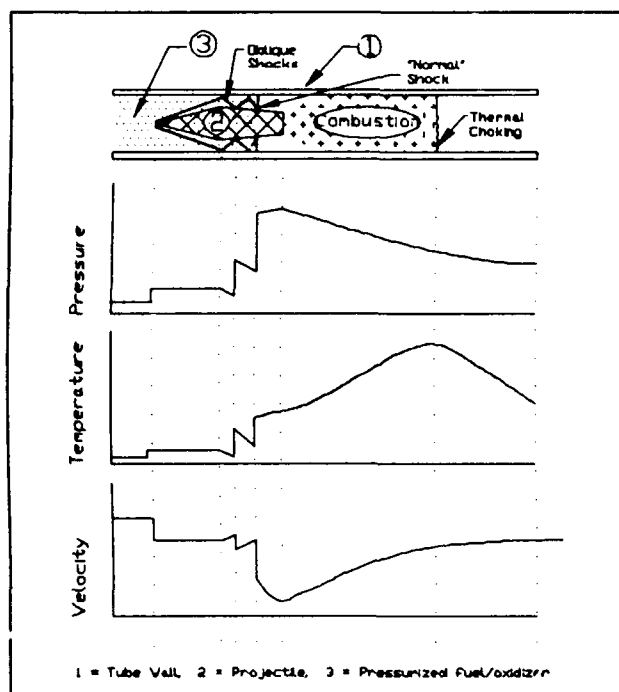


Figure 2. Qualitative Plots of Pressure, Temperature, and Velocity for Flow Around a Ram Accelerator Projectile in Supersonic Flow With Subsonic, Thermally Choked Combustion.

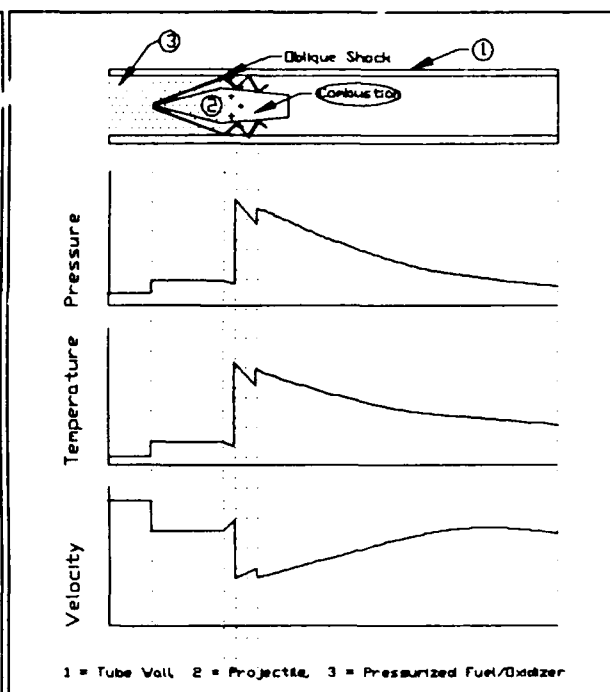


Figure 3. Qualitative Plots Of Pressure, Temperature, and Velocity for Flow Around a Ram Accelerator Projectile in Supersonic Flow With Supersonic, Oblique Detonation Wave Combustion.

1989; Burnham et al. 1985; Adamson and Morrison 1955; Lehr 1972; Pratt and Glenn 1987; Wang et al. 1988; Glenn and Pratt 1988). In this regime the oblique shock is sufficient to detonate the fuel/oxidizer. If the location of this detonation is tailored to occur behind the throat, this supersonic detonation wave may provide thrust to the projectile to velocities in excess of 10 km/s. This process is shown schematically in Figure 3.

## 2. ADVANTAGES AND DISADVANTAGES OF RAM ACCELERATION FOR LARGE CALIBER APPLICATIONS

### 2.1. Advantages

2.1.1. Propulsive Efficiencies. The primary benefit of ram acceleration is the ability to better tailor the pressure field and resultant acceleration of a projectile, as compared to conventional solid propulsion, over relatively long times and distances. Conventional chemical propulsion is quite efficient at quickly providing high propulsive pressures. However, due to the inherent nature of the pressure gradient involved, the efficiency drops off very quickly as much of the energy produced later in the cycle does not perform useful work on the projectile. This is mainly due to the fact that the propellant is burning well behind the projectile and must propel its own gases forward in an attempt to keep up with the projectile. As an example, IBHVG2 (Anderson and Fickie 1987) modeling calculations which depict the chamber, tube, and projectile base pressure profiles for a 120-mm gun,

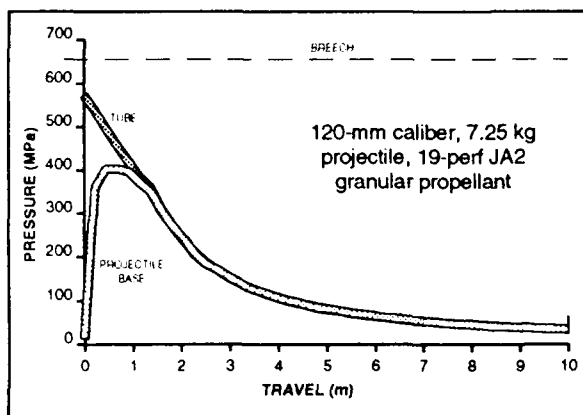


Figure 4. Plot of Breech, Tube, and Projectile Base Pressure Relationships for a Conventional Solid Propulsion Cycle.

projectile. Thus a nearly constant, if somewhat oscillatory, pressure field is produced directly behind or around the projectile for the duration of the propulsion cycle. A typical pressure pulse measured at the tube wall as the projectile and associated combustion field

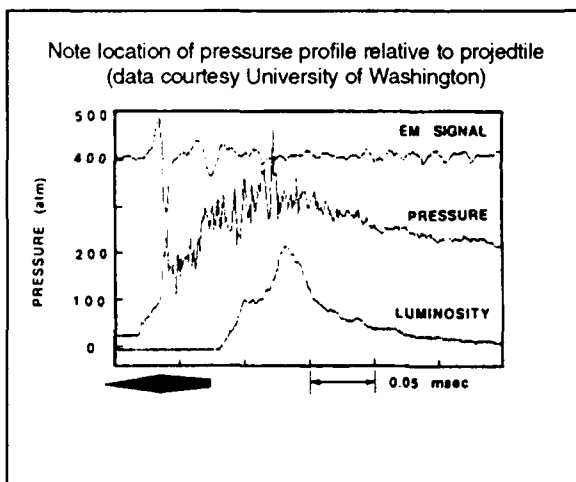


Figure 5. Typical Pressure, Magnetic Sensor (EM), and Luminosity Data From Thermally Choked Ram Accelerator Combustion.

firing a 7.26-kg (16-lb) projectile using nearly optimized 19-perforation, JA2, granular propellant are shown in Figure 4. For this calculation the peak breech pressure was fixed at 655 MPa (95 kpsi). Note that due mainly to the pressure gradient noted above, only a portion of the pressures that must be sustained by the breech, and to a lesser degree the early portions of the gun tube, act upon the projectile (for a short duration) to increase its acceleration.

Ram acceleration has, by design, a new supply of "propellant" available as it travels downbore. In addition, this gas mixture is consumed around or immediately behind the projectile. Thus a nearly constant, if somewhat oscillatory, pressure field is produced directly behind or around the projectile for the duration of the propulsion cycle. A typical pressure pulse measured at the tube wall as the projectile and associated combustion field pass is shown in Figure 5. By comparing the peak pressures measured at the tube wall during projectile passage with effective pressures to which the projectile would have had to be exposed to achieve measured velocity increases, one can infer the average efficiencies at which these peak tube wall loads are being transferred to the projectile to perform useful work. This is somewhat analogous to comparing breech and tube pressures to projectile base pressures and resultant velocities for solid propulsion as noted previously. For the ram acceleration process in subsonic combustion, this ratio of effective projectile drive pressure to maximum measured tube pressure has been termed the Thrust Pressure Ratio (TPR). Experimental data from UW firings have indicated that this value ranges from 0.15 to well over 0.70, with 0.60

being a readily achievable value for well tested fuel/oxidizer/diluent mixtures. Figure 6 plots a calculation of average tube versus projectile base pressures for a ram accelerator system operating at 655 MPa (95 kpsi) peak pressure. Note that these peak pressures are similar to those shown for the solid propulsion case of Figure 4. The advantages of ram acceleration as tube length increases become apparent by comparing Figures 4 and 6.

Before leaving the subject of propulsion efficiency, it is illustrative to point out that the inbore ram acceleration process does have some similarities to the much investigated traveling charge effect, in that combustion takes place near or around the projectile base for an extended period of time providing additional thrust to the projectile beyond that from a conventional, chamber-emplaced charge. However, it differs in two important aspects: first, since the gas mixture is not carried by the projectile, but is supplied in the gun tube, there is no penalty associated with accelerating the traveling charge itself; second, in the inbore ram concept, fuel/oxidizer/diluent is always available irrespective of the propulsion cycle time/length (i.e., propellant does not burn out prematurely).

2.1.2. Pre- And Post-Combustion Pressure Relationship. Experimental work carried out to date at the UW has shown that, for most test conditions exhibiting thermally choked combustion, there is a nearly linear relationship between the gas mixture pre- and post-combustion pressures. This relationship is shown in Figure 7. If this relationship holds at high pressures, it would allow considerable flexibility in the manner in which the ram accelerator is used. For example, to launch a projectile of a given mass at a given velocity, the accelerator designer may select a tube with long travel employing gas mixtures at low pressure, or an accelerator of shorter travel using gases at higher pressure, limited only by the vapor pressure of the gases.

2.1.3. Readily Available And Easily Tailored "Propellant". It has been well demonstrated at the UW that combustion in the subsonic regime behind the normal shock is most efficient if the projectile Mach number (relative to the gas mixtures) ranges between 2.5 to 4. This Mach number, among other properties, can be adjusted by varying the gas mixtures employed. Table 1 gives several examples of how these properties can be tailored. Since the ram accelerator uses commonly available gases such as methane,

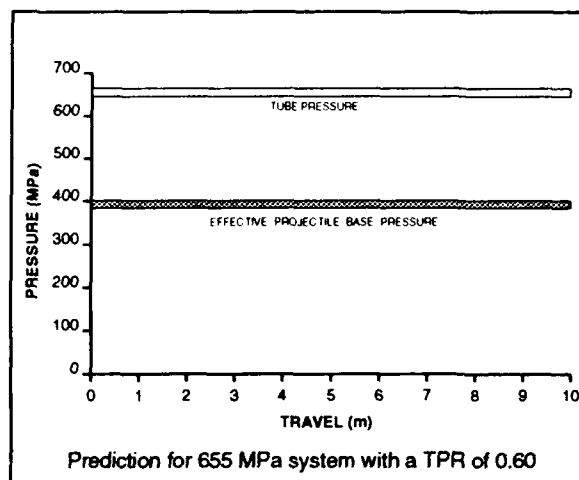


Figure 6. Effective Pressure Distribution On a Ram Projectile Operating in the Subsonic Combustion, Thermally Choked Mode.

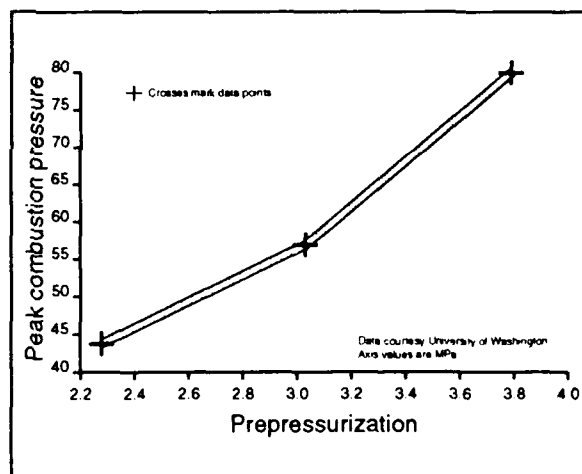


Figure 7. Plot of Pre- and Post-Combustion Pressure Ratios for Several Pressurizations in 2.7 CH<sub>4</sub> + 2.0 O<sub>2</sub> + 5.8 N<sub>2</sub> Fuel/Oxidizer/Diluent Mixtures With Approximately Same Mass Projectiles.

Table 1. Properties of Gas Mixtures for Ram Acceleration.							
Formulas	Projectile Mach Number			Detonation Velocity (m/s)	Molecular Weight	Gamma	Density (kg/m <sup>3</sup> )
	1	2.5	4.0				
	Projectile Velocity (m/s)						
2.6 CH <sub>4</sub> + 2O <sub>2</sub> + 5.6N <sub>2</sub>	363	908	1452	1740	25.74	1.369	1.052
2.5 CH <sub>4</sub> + 2O <sub>2</sub> + 12He	640	1600	2560	2854	9.22	1.527	0.377
24H <sub>2</sub> + 2O <sub>2</sub>	897	2243	3588	3805	4.32	1.404	0.177
Typical current (first two) and proposed gas fuel oxidizer mixtures							

hydrogen, oxygen, nitrogen, and helium for fuels, oxidizers, and diluents, the necessary mix can be custom made on site for the appropriate application.

2.1.4. Performance Potential. As previously mentioned, there are well documented calculations (Hertzberg, Bruckner, and Bogdanoff 1986, 1988; Knowlen et al. 1987; Kaloupis and Bruckner 1988) that reveal that ODW ram acceleration may be capable of extremely high velocities, on the order of 10 km/s or higher. Additionally, the processes for both thermally choked and ODW ram acceleration should be scalable to very large masses. There are many attendant problems such as projectile ablation and material integrity that are unrelated to propulsion at these very high velocities; however, the requisite propulsion technology may be available in ram acceleration. Recent research at the University of Washington (Bruckner et al. 1988; Knowlen et al. 1988; Bruckner, Hertzberg, and Knowlen, to be published; Yungster and Bruckner 1989) suggests that transition from thermally choked (subsonic) combustion to mixed mode (sub/supersonic) combustion is achievable with single projectile designs and single gas mixtures. It is unclear at this point if this transition can be maintained up to and through fully supersonic propulsion schemes such as ODW.

2.1.5. Projectile Acceleration And Tube Recoil. Finally, there may be benefits of ram propulsion in terms of acceleration tailoring of sensitive cargoes, and reduced recoil loads on propulsion test beds.

## 2.2. Disadvantages

2.2.1. Pre-accelerator Required. As with the aircraft ramjet engine, the ram accelerator requires that the projectile have an initial velocity before the process will commence. In general, this initial velocity is on the order of several times the sound speed

of the gas mixtures used. This prerequisite necessitates the use of a "start up" propulsion technique such as a light gas gun or a conventional solid propellant gun. This hybrid propulsion complicates the use of the technology in applications where total system constraints such as length, weight, and volume are fixed. However, it is a relatively minor burden for research applications unencumbered by such restrictions.

#### 2.2.2. Projectile Subcaliber By Nature.

Due to a need for a flow of propulsive gases around the ram projectile, the projectile is by design subcaliber. In practice this means that, unlike conventional projectiles, which through the use of obturators and/or sabots are full caliber, the ram projectile does not provide full bore projected area on which the propulsive pressures may act. This is illustrated in Figure 8. Current ram projectiles fill approximately 60 percent of the bore area not including projected area of the fin. Some theoretical work (Yungster and Bruckner 1989) indicates this area ratio may be increased to well above 70 percent with no penalty in efficiencies.

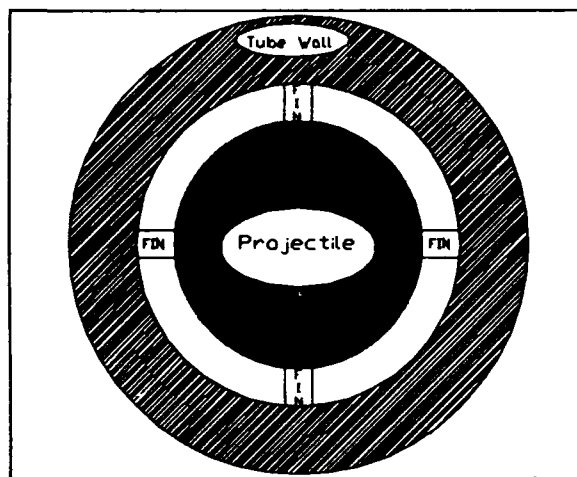


Figure 8. Rear View of Projectile in Gun Tube Showing Diametric Clearance Between Projectile and Tube Walls.

2.2.3. Accelerator End Sealing Required. The ram accelerator must currently be sealed at its ends to contain the pressurized propulsive gases as shown schematically in Figure 9. For research applications this appears to be only a minor drawback with the

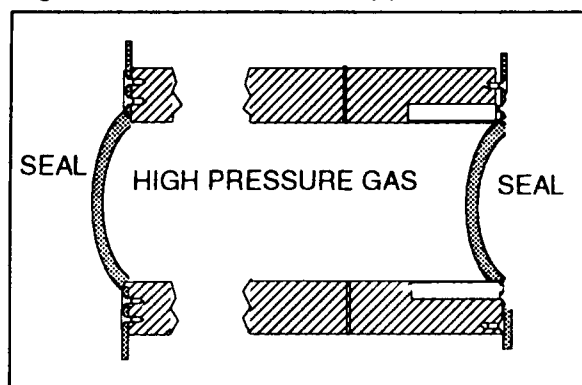


Figure 9. Schematic of Ram Accelerator End Sealing.

exception of accelerators with very high prepressures which require skillful seal design to contain the gases while presenting minimum resistance to the entrance of the ram projectile. For applications requiring rapid firing rates, end sealing requires a more complex engineering solution. There has been research (Fisher and Chandra, to be published) into eliminating the seals altogether. These techniques, a discussion of which is beyond the scope of this paper, offer the promise of both sealless systems and rapid accelerator charging.

2.2.4. Concept Unproven Beyond 3 Km/s. As research at the University of Washington approaches projectile velocities of 3 km/s, it is becoming apparent that the underlying combustion processes are more complicated than originally believed. Previous work (Hertzberg, Bruckner, and Bogdanoff 1986, 1988; Bruckner et al. 1987; Knowlen et al. 1987) predicted that propulsion efficiencies would decrease with a single projectile shape and gas mixture as relative projectile velocity increased due to the combustion front



moving further behind the projectile and would approach zero near the Chapman-Jouguet (CJ) number. Experimental results, however, differ dramatically. As shown in Figure 10, as the CJ number is approached, thrust performance increases dramatically (particularly for the lower CJ number mixes). Recent work by Nusca (1991) suggests that the combustion front is indeed moving rearward, exposing less of the projectile to the high pressure field; however, the pressure levels increase dramatically which results in a net thrust increase. It also appears that the shock structure becomes more stable above the CJ number. It is not known at this time if further transition to fully supersonic combustion can be obtained without projectile or fuel/oxidizer/diluent changes (i.e. higher cone angles and/or higher CJ number mixes). However, these recent findings suggest that combustion modes not previously demonstrated are obtainable.

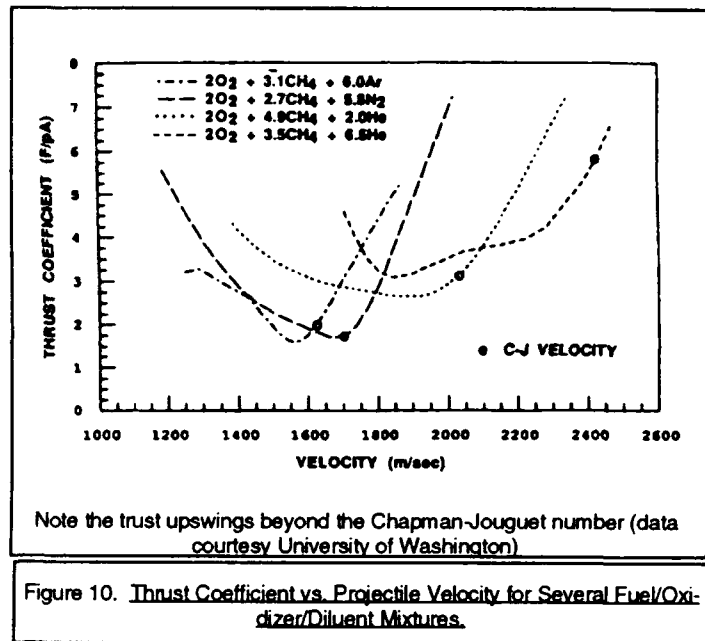


Figure 10. Thrust Coefficient vs. Projectile Velocity for Several Fuel/Oxidizer/Diluent Mixtures.

### 3. ACCELERATOR PERFORMANCE SUMMARY

Velocity versus travel plots for the conventional and ram propulsion processes previously discussed (Figures 4 and 6) appear in Figure 11. The conventional calculations were performed using the IBHVG2 lumped-parameter interior ballistic code with a Pidduck-Kent pressure gradient (Anderson and Fickie 1987). Ram calculations were performed using a modified constant base pressure algorithm. The calculations assume that the gun tube is capable of operating at pressures of 655 MPa (95 kpsi) over the entire length of travel. For comparative purposes both projectiles are started from rest and a maximum tube pressure of 655 MPa is applied. In the conventional case this implies a very quick ramp up in pressure followed by a quick fall off as the projectile moves down bore and volume is opened up faster than gases can be generated to fill it. For the ram process the 655 MPa pressure on the tube is held constant for the entire length of travel. Note that neither the conventional projectile nor the ram projectile experience the complete 655 MPa pressure at its base. In the

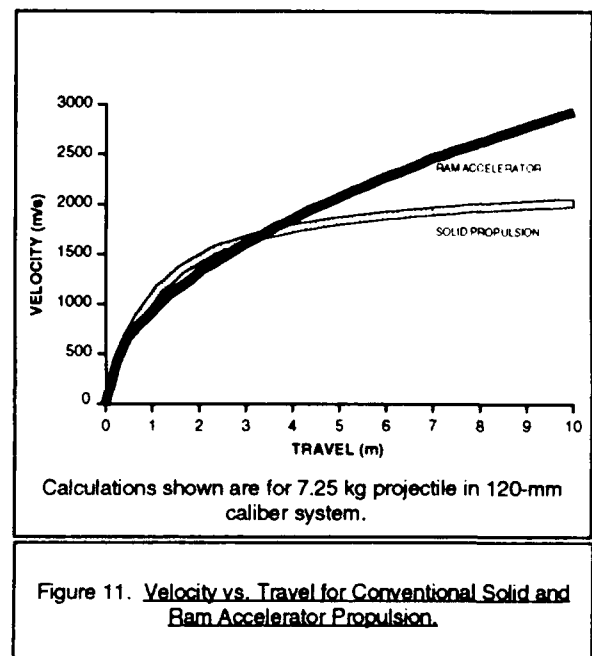


Figure 11. Velocity vs. Travel for Conventional Solid and Ram Accelerator Propulsion.

conventional case, the peak base pressure occurs 0.70 meters from the start of travel and is 62 percent of the breech pressure or 403 MPa and then quickly falls off. For the ram projectile an average base pressure of 60 percent of tube pressure or 393 MPa is applied to the projectile as it travels downbore (a TPR of 0.60). Additionally, in the ram accelerator calculation the effective base pressure is applied only to the subcaliber projected base area (70 percent of bore), unlike the conventional calculation which uses the full bore area as projectile base area.

Note that for the conditions in this calculation the ram accelerator begins to overtake the performance of a conventional propulsion system after 3.5 meters of travel. This type of system specific evaluation is useful in revealing where the ram accelerator performance benefits lie as well as pinpointing optimum take-over points (transition to ram propulsion) for hybrid systems.

Since these calculations represent a nearly optimized conventional propulsion system which is well understood, it is unlikely that the conventional performance could be increased significantly. However, potential increases in the ram projectile diameter and efficiency of the combustion process may improve the ram accelerator performance further.

#### 4. POTENTIAL USES OF A RAM ACCELERATOR

4.1 The RAM accelerator as a research tool. As a technique for generating high velocities with projectiles/payloads of significant mass where the length of the system and the firing rates are not critical, the ram accelerator appears quite promising. Table 2 presents some of the generic uses for such a technique. Ram acceleration has been and continues to be considered for use in programs ranging from the National Aerospace Program (NASP), Strategic Defense Initiative (SDI) applications, and Air Force and Army hypervelocity programs. There is also considerable interest in the European research community centered around efforts at the Institute for French-German Research located in Saint Louis, France where both 38- and 90-mm ram accelerators are being constructed.

4.2. The RAM accelerator as a weapon. There is, at present, too little known about the physics and engineering of the ram acceleration process (scaling, system charging, hybrid effects, performance, etc.), to make any definitive statements regarding its use in mobile, rapid firing systems. However, there may be implementations in the near future for fixed position, low firing rate applications such as ground based interceptors.

Table 2. Potential Applications of a Large Caliber Ram Accelerator.

- ☒ IMPACT STUDIES
  - HIGH VELOCITY AND / OR MASS STUDIES OF:
    - PENETRATION
    - LETHALITY
    - MATERIALS ANALYSIS
- ☒ PROJECTILE / VEHICLE STUDIES OF:
  - ABLATION
  - STRUCTURAL INTEGRITY
  - FLIGHT DYNAMICS
- ☒ PROPULSION STUDIES OF:
  - RAM / SCRAM ANALOGY STUDIES
  - GAS DYNAMICS AND HEAT TRANSFER AT HIGH MACH NUMBERS

## 5. THE HYBRID INBORE RAM (HIRAM) ACCELERATOR PROGRAM

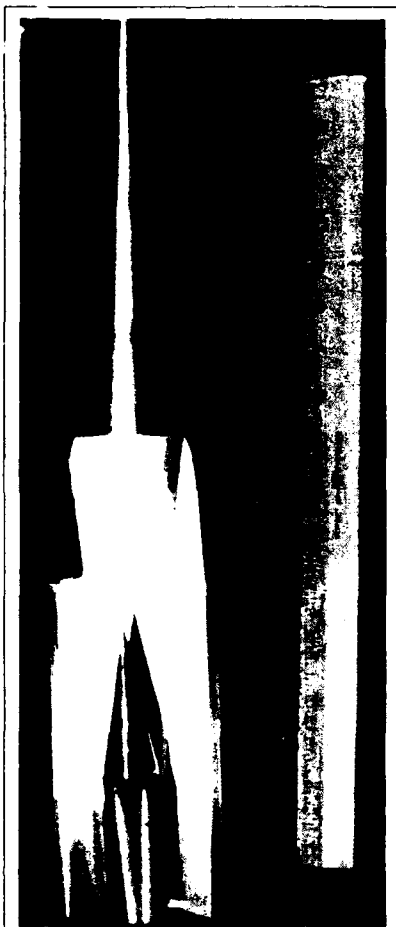


Figure 12. 120-mm Hybrid Inbore Ram (HIRAM) Projectile Contrasted with 38-mm University of Washington Projectile.

The US Army Ballistic Research Laboratory (BRL) has initiated a research program to examine the feasibility of inbore ram acceleration technology for large caliber hypervelocity launch, flight, and penetration studies. The primary goal of this effort is to examine the basic physics and chemistry of the process in sufficient detail to support the design and fabrication of a 120-mm ram accelerator research facility. Additionally, BRL will support assessment of inbore ramjet technologies for tactical and strategic applications as the technology matures.

The progress to date in the analytical and modeling areas is beyond the scope of this paper and is partly covered in other references (Nusca 1991a, 1991b). The remainder of this paper is devoted to the engineering and experimental aspects of the HIRAM program.

The selection of 120 mm for the scale up is based on several factors. First, facilities currently exist in this caliber which can be modified for use as both a preaccelerator and the accelerator itself. The preaccelerator will be a standard 120-mm tank gun using standard and advanced solid propellants. The accelerator sections will be mounted in a preexisting facility modified for such use. Secondly, it was deemed desirable to demonstrate the scaling capabilities in a system capable of achieving high velocity launches of significant masses of interest to the ballistics research community, (i.e., 5-10 kg). A scaled up version of the UW projectile is shown in Figure 12 contrasted with a typical UW

38-mm projectile. The projectile assembled in a cartridge for firing in a 120-mm accelerator is depicted schematically in Figure 13.

This projectile with a granular charge propulsion package has been tested in conventional 120-mm gun firings to velocities of 1500 m/s and should be capable of preaccelerator injection velocities exceeding 2000 m/s.


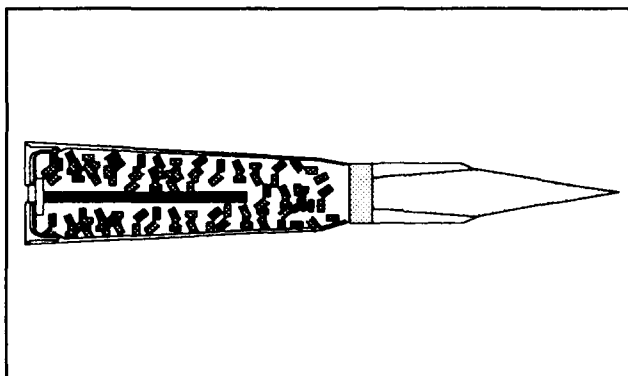


Figure 13. 120-mm Hybrid Inbore Ram (HIRAM) Cartridge.

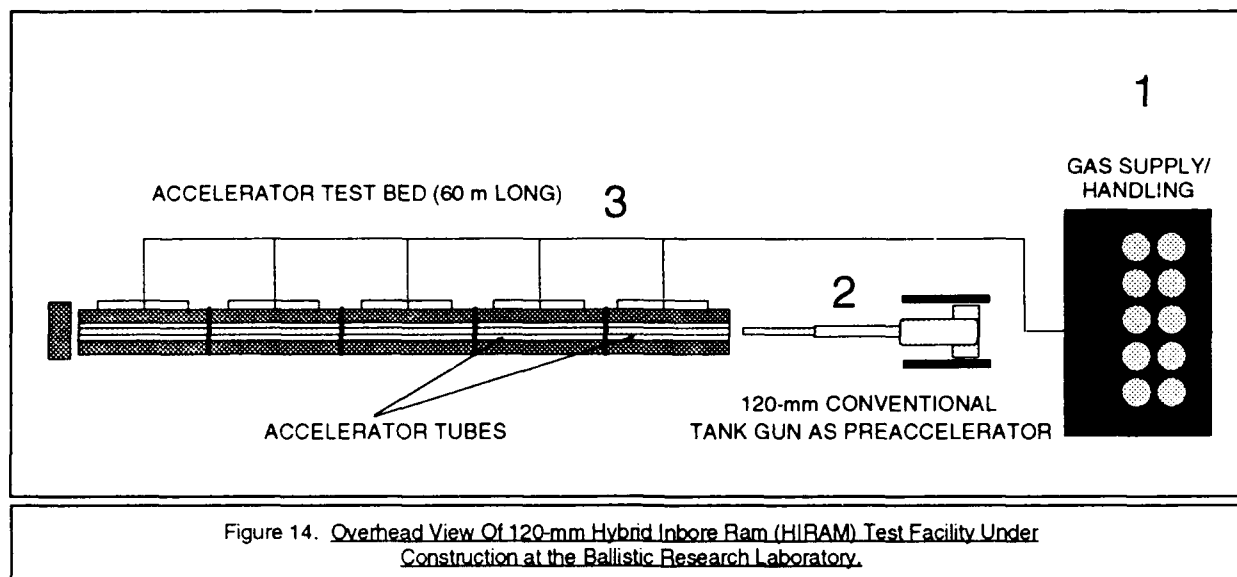

system capable of handling combustible and inert gases to pressures of 34.5 MPa (5 kpsi). These gases include but are not limited to methane, hydrogen, helium, oxygen, and nitrogen. The gases selected will be pumped individually into accelerator sections mounted in a test bed downbore of the preaccelerator. The gases will be mixed by partial pressure in one or more accelerator sections mounted in the accelerator test bed. The accelerator test sections will initially be made from retired 120-mm gun tubes appropriately sectionalized, sealed, and mated. It is anticipated that up to three sections each of 4.7 meters in length will initially be employed. The accelerator test bed is capable of mounting up to 60 meters of accelerator sections.

Since standard 120-mm gun tubes will be initially used, the maximum accelerator post-combustion pressures will be limited to 207 MPa (30 kpsi). It is hoped to eventually have custom tubes made, capable of constant pressures of 690 MPa (100 kpsi) over their entire length, to fully exploit the advantages of ram acceleration.

## 6. CLOSING REMARKS

Ram acceleration has been demonstrated in medium caliber to velocities approaching 3 km/s. Theoretical calculations predict that the propulsion technology may be capable of delivering significant masses to velocities over 10 km/s. The technology appears viable for near-term use in laboratory hypervelocity launchers and fixed position low firing rate weapons. The Ballistic Research Laboratory has initiated a program of theoretical and experimental studies to scale the technology to 120-mm caliber for laboratory hypervelocity studies of launch, flight, and terminal ballistics. Assessment of potential for tactical applications will continue as the technology matures.

## 7. REFERENCES

- Adamson, T.C., and R.B. Morrison. "On the Classification of Normal Detonation Waves." Jet Propulsion, August 1955.
- Anderson, R.D., and K.D. Fickie. "IBHVG2 -- A User's Guide". BRL-TR-2829, US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, July 1987.
- Bruckner, A.P., D.W. Bogdanoff, C. Knowlen, and A. Hertzberg. "Investigations of Gasdynamic Phenomena Associated with the Ram Accelerator Concept." AIAA Paper 87-1327, presented at the AIAA 19th Fluid Dynamics, Plasma Dynamics and Lasers Conference, Honolulu, Hawaii, June 1987.
- Bruckner, A.P., and A. Hertzberg. "Development of the Ram Accelerator Hypervelocity Launcher." Proceedings of the 38th Aeroballistic Range Association Meeting, Tokyo, Japan, October 1987.
- Bruckner, A.P., A. Hertzberg, and C. Knowlen. "Review of Ram Accelerator Propulsion Modes." Proceedings of the 27th JANNAF Combustion Meeting, November 1990 (in publication).
- Bruckner, A.P., C. Knowlen, K.A. Scott, and A. Hertzberg. "High Velocity Modes of the Thermally Choked Ram Accelerator." Proceedings of the 40th Aeroballistic Range Association Meeting, Paris, France, September 1989.
- Burnham, E.A., A.E. Kull, C. Knowlen, A.P. Bruckner, and A. Hertzberg. "Operation of the Ram Accelerator in the Transdetonative Velocity Regime." AIAA Paper 90-1985, presented at the AIAA/SAE/ASME/ASEE 26th Joint Propulsion Conference, Orlando, Florida, July 1990.
- Fisher, E.B., and S. Chandra. "A Dynamic Charging System for the Ram Accelerator for Hypervelocity Applications." Proceedings of the 27th JANNAF Combustion Meeting, November 1990 (in publication).
- Glenn, D.E., and D.T. Pratt. "Numerical Modeling of Standing Oblique Detonation Waves." AIAA Paper 88-0440, presented at the AIAA 26th Aerospace Sciences Meeting, January 1988.
- Hertzberg, A., A.P. Bruckner, and D. W. Bogdanoff. "The Ram Accelerator: A New Chemical Method of Achieving Ultrahigh Velocities." Proceedings of the 37th Aeroballistic Range Association Meeting, Quebec, Canada, September 1986.
- Hertzberg, A., A.P. Bruckner, and D.W. Bogdanoff. "Ram Accelerator: A New Chemical Method for Accelerating Projectiles to Ultrahigh Velocities." AIAA Journal, vol. 26, pp. 195-203, 1988.

- Kaloupis, P., and A.P. Bruckner, "The Ram Accelerator: A Chemically Driven Mass Launcher." AIAA Paper 88-2968, presented at the AIAA/ASME/SAE/ASEE 24th Joint Propulsion Conference, Boston, Massachusetts, July 1988.
- Knowlen, C., A.P. Bruckner, D. W. Bogdanoff, and A. Hertzberg. "Performance Capabilities of the Ram Accelerator." AIAA Paper 87-2152, presented at the AIAA/SAE/ASME/ASEE 23rd Joint Propulsion Conference, San Diego, California, July 1987.
- Knowlen, C., K.A. Scott, A.P. Bruckner, and A. Hertzberg. "Recent Developments in Ram Accelerator Technology." Proceedings of the 39th Aeroballistic Range Association Meeting, Albuquerque, New Mexico, October 1988.
- Kull, A.E., E.A. Burnham, C. Knowlen, A.P. Bruckner, and A. Hertzberg. "Experimental Studies of Superdetonative Ram Accelerator Modes." AIAA Paper 89-2632, presented at the AIAA/SAE/ASME/ASEE 25th Joint Propulsion Conference, Monterey, California, July 1989.
- Lehr, H.F., "Experiments of Shock-Induced Combustion," Astronautica Acta., 17(4 and 5), 1972.
- Nusca, M.J., "Numerical Simulation of Reacting Flow in a Thermally Choked Ram Accelerator - Model Development and Validation." BRL-TR-3222, US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, April 1991.
- Nusca, M.J., "Numerical Simulation of Reacting Flow in a Thermally Choked Ram Accelerator Projectile Launch System. AIAA Paper 91-2490, presented at the AIAA/ASME/SAE 27th Joint Propulsion Conference and Exhibit, Sacramento, California, June 1991.
- Ostrander, M.J., M.F. Hyde, R.D. Young, and R.D. Kissinger. "Standing Oblique Detonation Wave Engine Performance." AIAA Paper 87-2002, presented at the AIAA/SAE/ASME/ASEE 23rd Joint Propulsion Conference, San Diego, California, July 1987.
- Pratt, D.T., and D.E. Glenn. "Numerical Simulation of a Standing Oblique Hydrogen-Air Detonation Wave." SIAM Conference on Numerical Combustion, March, 1987.
- Pratt, D.T., J.W. Humphrey, and D.E. Glenn. "Morphology of a Standing Oblique Detonation Wave." AIAA Paper 87-1785, presented at the AIAA/SAE/ASME/ASEE 23rd Joint Propulsion Conference, San Diego, California, July 1987.

Wang, Y., T. Fujiwara, T. Aoki, H. Arakawa, and T. Ishiguro, "Three-Dimensional Standing Oblique Detonation Wave in a Hypersonic Flow." AIAA paper AIAA-88-0478, presented at the AIAA 26th Aerospace Sciences Meeting, January 1988.

Yungster, S., and A.P. Bruckner. "A Numerical Study of the Ram Accelerator Concept in the Superdetonative Velocity Range." AIAA Paper 89-2677, presented at the 25th Joint Propulsion Conference, Monterey, California, July 1989.

Yungster, S., S. Eberhardt, and A.P. Bruckner. "Numerical Simulation of Shock-Induced Combustion Generated by High-Speed Projectiles in Detonatable Gas Mixtures." AIAA Paper 89-0673, presented at the 27th Aerospace Sciences Meeting, Reno, Nevada, January 1989.

INTENTIONALLY LEFT BLANK.



No. of Copies	Organization	No. of Copies	Organization
2	Administrator Defense Technical Info Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145	1	Commander U.S. Army Missile Command ATTN: AMSMI-RD-CS-R (DOC) Redstone Arsenal, AL 35898-5010
1	Commander U.S. Army Materiel Command ATTN: AMCDRA-ST 5001 Eisenhower Avenue Alexandria, VA 22333-0001	1	Commander U.S. Army Tank-Automotive Command ATTN: ASQNC-TAC-DIT (Technical Information Center) Warren, MI 48397-5000
1	Commander U.S. Army Laboratory Command ATTN: AMSLC-DL 2800 Powder Mill Road Adelphi, MD 20783-1145	1	Director U.S. Army TRADOC Analysis Command ATTN: ATRC-WSR White Sands Missile Range, NM 88002-5502
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-IMI-I Picatinny Arsenal, NJ 07806-5000	1	Commandant U.S. Army Field Artillery School ATTN: ATSF-CSI Ft. Sill, OK 73503-5000
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-TDC Picatinny Arsenal, NJ 07806-5000	(Class. only) 1	Commandant U.S. Army Infantry School ATTN: ATSH-CD (Security Mgr.) Fort Benning, GA 31905-5660
1	Director Benet Weapons Laboratory U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCB-TL Watervliet, NY 12189-4050	(Unclass. only) 1	Commandant U.S. Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905-5660
(Unclass. only) 1	Commander U.S. Army Armament, Munitions and Chemical Command ATTN: AMSMC-IMF-L Rock Island, IL 61299-5000	1	Air Force Armament Laboratory ATTN: WL/MNOI Eglin AFB, FL 32542-5000  <u>Aberdeen Proving Ground</u>
1	Director U.S. Army Aviation Research and Technology Activity ATTN: SAVRT-R (Library) M/S 219-3 Ames Research Center Moffett Field, CA 94035-1000	2	Dir, USAMSAA ATTN: AMXSY-D AMXSY-MP, H. Cohen
		1	Cdr, USATECOM ATTN: AMSTE-TC
		3	Cdr, CRDEC, AMCCOM ATTN: SMCCR-RSP-A SMCCR-MU SMCCR-MSI
		1	Dir, VLAMO ATTN: AMSLC-VL-D
		10	Dir, BRL ATTN: SLCBR-DD-T

No. of  
Copies Organization

- 1 Commander  
U.S. Army Concepts Analysis Agency  
ATTN: D. Hardison  
8120 Woodmont Ave.  
Bethesda, MD 20014
- 1 C.I.A.  
01R/DB/Standard  
Washington, DC 20505
- 1 Director  
U.S. Army Ballistic Missile  
Defense Systems Command  
Advanced Technology Center  
P. O. Box 1500  
Huntsville, AL 35807-3801
- 1 Chairman  
DOD Explosives Safety Board  
Room 856-C  
Hoffman Bldg. 1  
2461 Eisenhower Ave.  
Alexandria, VA 22331-0600
- 1 Commander  
U.S. Army Materiel Command  
ATTN: AMCDE-DW  
5001 Eisenhower Ave.  
Alexandria, VA 22333-5001
- 1 Department of the Army  
Office of the Product Manager  
155mm Howitzer, M109A6, Paladin  
ATTN: SFAE-AR-HIP-IP, Mr. R. De Kleine  
Picatinny Arsenal, NJ 07806-5000
- 2 Commander  
Production Base Modernization Agency  
U.S. Army Armament Research,  
Development, and Engineering Center  
ATTN: AMSMC-PBM, A. Siklosi  
AMSMC-PBM-E, L. Laibson  
Picatinny Arsenal, NJ 07806-5000

No. of  
Copies Organization

- 3 PEO-Armaments  
Project Manager  
Tank Main Armament Systems  
ATTN: AMCPM-TMA, K. Russell  
AMCPM-TMA-105  
AMCPM-TMA-120, C. Roller  
Picatinny Arsenal, NJ 07806-5000
- 15 Commander  
U.S. Army Armament Research,  
Development, and Engineering Center  
ATTN: SMCAR-AEE  
SMCAR-AEE-B,  
A. Beardell  
D. Downs  
S. Einstein  
S. Westley  
S. Bernstein  
J. Rutkowski  
B. Brodman  
P. Bostonian  
R. Cirincione  
A. Grabowsky  
P. Hui  
J. O'Reilly  
N. Ross  
SMCAR-AES, S. Kaplowitz, Bldg. 321  
Picatinny Arsenal, NJ 07806-5000
- 2 Commander  
U.S. Army Armament Research,  
Development, and Engineering Center  
ATTN: SMCAR-CCD, D. Spring  
SMCAR-CCH-V, C. Mandala  
Picatinny Arsenal, NJ 07806-5000
- 1 Commander  
U.S. Army Armament Research,  
Development, and Engineering Center  
ATTN: SMCAR-HFM, E. Barriores  
Picatinny Arsenal, NJ 07806-5000
- 1 Commander  
U.S. Army Armament Research,  
Development, and Engineering Center  
ATTN: SMCAR-FSA-T, M. Salsbury  
Picatinny Arsenal, NJ 07806-5000

No. of  
Copies Organization

- 1 Commander, USACECOM  
R&D Technical Library  
ATTN: ASQNC-ELC-IS-L-R, Myer Center  
Fort Monmouth, NJ 07703-5301
- 1 Commander  
U.S. Army Harry Diamond Laboratories  
ATTN: SLCHD-TA-L  
2800 Powder Mill Rd.  
Adelphi, MD 20783-1145
- 1 Commandant  
U.S. Army Aviation School  
ATTN: Aviation Agency  
Fort Rucker, AL 36360
- 2 Program Manager  
U.S. Tank-Automotive Command  
ATTN: AMCPM-ABMS, T. Dean (2 cy)  
Warren, MI 48092-2498
- 1 Program Manager  
U.S. Tank-Automotive Command  
Fighting Vehicles Systems  
ATTN: AMCPM-BFVS  
Warren, MI 48092-2498
- 1 President  
U.S. Army Armor & Engineer Board  
ATTN: ATZK-AD-S  
Fort Knox, KY 40121
- 1 Project Manager  
U.S. Army Tank-Automotive Command  
M-60 Tank Development  
ATTN: AMCPM-ABMS  
Warren, MI 48092-2498
- 1 Director  
HQ, TRAC RPD  
ATTN: ATCD-MA  
Fort Monroe, VA 23651-5143
- 2 Director  
U.S. Army Materials Technology  
Laboratory  
ATTN: SLCMT-ATL (2 cy)  
Watertown, MA 02172-0001

No. of  
Copies Organization

- 1 Commander  
U.S. Army Research Office  
ATTN: Technical Library  
P.O. Box 12211  
Research Triangle Park, NC 27709-2211
- 1 Commander  
U.S. Army Belvoir Research and  
Development Center  
ATTN: STRBE-WC  
Fort Belvoir, VA 22060-5006
- 1 Director  
U.S. Army TRAC-Ft. Lee  
ATTN: ATRC-L, Mr. Cameron  
Fort Lee, VA 23801-6140
- 1 Commandant  
U.S. Army Command and General  
Staff College  
Fort Leavenworth, KS 66027
- 1 Commandant  
U.S. Army Special Warfare School  
ATTN: Rev and Trng Lit Div  
Fort Bragg, NC 28307
- 3 Commander  
Radford Army Ammunition Plant  
ATTN: SMCAR-QA/HI LIB (3 cps)  
Radford, VA 24141-0298
- 1 Commander  
U.S. Army Foreign Science and  
Technology Center  
ATTN: AMXST-MC-3  
220 Seventh Street, NE  
Charlottesville, VA 22901-5396
- 2 Commander  
Naval Sea Systems Command  
ATTN: SEA 62R  
SEA 64  
Washington, DC 20362-5101
- 1 Commander  
Naval Air Systems Command  
ATTN: AIR-954-Technical Library  
Washington, DC 20360

No. of  
Copies Organization

- 1 Assistant Secretary of the Navy  
(R, E, and S)  
ATTN: R. Reichenbach  
Room 5E787  
Pentagon Bldg  
Washington, DC 20375
- 1 Naval Research Laboratory  
Technical Library  
Washington, DC 20375
- 2 Commandant  
U.S. Army Field Artillery Center  
and School  
ATTN: ATSF-CO-MW, E. Dublisky (2 cps)  
Fort Sill, OK 73503-5600
- 1 Office of Naval Research  
ATTN: Code 473, R. S. Miller  
800 N. Quincy Street  
Arlington, VA 22217-9999
- 3 Commandant  
U.S. Army Armor School  
ATTN: ATZK-CD-MS, M. Falkovitch (3 cps)  
Armor Agency  
Fort Knox, KY 40121-5215
- 2 Commander  
U.S. Naval Surface Warfare Center  
ATTN: J. P. Consaga  
C. Gotzmer  
Indian Head, MD 20640-5000
- 4 Commander  
Naval Surface Warfare Center  
ATTN: Code 240, S. Jacobs  
Code 730  
Code R-13,  
K. Kim  
R. Bernecker  
Silver Spring, MD 20903-5000
- 2 Commanding Officer  
Naval Underwater Systems Center  
ATTN: Code 5B331, R. S. Lazar  
Technical Library  
Newport, RI 02840

No. of  
Copies Organization

- 5 Commander  
Naval Surface Warfare Center  
ATTN: Code G33,  
J. L. East  
W. Burrell  
J. Johndrow  
Code G23, D. McClure  
Code DX-21 Technical Library  
Dahlgren, VA 22448-5000
- 3 Commander  
Naval Weapons Center  
ATTN: Code 388, C. F. Price  
Code 3895, T. Parr  
Information Science Division  
China Lake, CA 93555-6001
- 1 OSD/SDIO/IST  
ATTN: Dr. Len Caveny  
Pentagon  
Washington, DC 20301-7100
- 3 Commander  
Naval Ordnance Station  
ATTN: T. C. Smith  
D. Brooks  
Technical Library  
Indian Head, MD 20640-5000
- 1 AL/TSTL (Technical Library)  
ATTN: J. Lamb  
Edwards AFB, CA 93523-5000
- 1 AFATL/DLYV  
Eglin AFB, FL 32542-5000
- 1 AFATL/DLXP  
Eglin AFB, FL 32542-5000
- 1 AFATL/DLJE  
Eglin AFB, FL 32542-5000
- 1 NASA/Lyndon B. Johnson Space Center  
ATTN: NHS-22 Library Section  
Houston, TX 77054

No. of  
Copies Organization

- 1 AFELM, The Rand Corporation  
ATTN: Library D  
1700 Main Street  
Santa Monica, CA 90401-3297
- 3 AAI Corporation  
ATTN: J. Hebert  
J. Frankle  
D. Cleveland  
P.O. Box 126  
Hunt Valley, MD 21030-0126
- 2 Aerojet Solid Propulsion Company  
ATTN: P. Micheli  
L. Torreyson  
Sacramento, CA 96813
- 1 Atlantic Research Corporation  
ATTN: M. King  
5390 Cherokee Ave.  
Alexandria, VA 22312-2302
- 3 AL/LSCF  
ATTN: J. Levine  
L. Quinn  
T. Edwards  
Edwards AFB, CA 93523-5000
- 1 AVCO Everett Research Laboratory  
ATTN: D. Stickler  
2385 Revere Beach Parkway  
Everett, MA 02149-5936
- 2 Calspan Corporation  
ATTN: C. Murphy (2 cps)  
P.O. Box 400  
Buffalo, NY 14225-0400
- 1 General Electric Company  
Tactical Systems Department  
ATTN: J. Mandzy  
100 Plastics Ave.  
Pittsfield, MA 01201-3698
- 1 IITRI  
ATTN: M. J. Klein  
10 W. 35th Street  
Chicago, IL 60616-3799

No. of  
Copies Organization

- 1 Hercules, Inc.  
Allegheny Ballistics Laboratory  
ATTN: William B. Walkup  
P.O. Box 210  
Rocket Center, WV 26726
- 1 Hercules, Inc.  
Radford Army Ammunition Plant  
ATTN: E. Hibshman  
Radford, VA 24141-0299
- 3 Director  
Lawrence Livermore National  
Laboratory  
ATTN: L-355,  
A. Buckingham  
M. Finger  
L-324, M. Constantino  
P.O. Box 808  
Livermore, CA 94550-0622
- 1 Olin Corporation  
Badger Army Ammunition Plant  
ATTN: F. E. Wolf  
Baraboo, WI 53913
- 3 Olin Ordnance  
ATTN: E. J. Kirschke  
A. F. Gonzalez  
D. W. Worthington  
P.O. Box 222  
St. Marks, FL 32355-0222
- 1 Paul Gough Associates, Inc.  
ATTN: Dr. Paul S. Gough  
1048 South Street  
Portsmouth, NH 03801-5423
- 1 Physics International Company  
ATTN: Library, H. Wayne Wampler  
2700 Merced Street  
San Leandro, CA 98457-5602
- 1 Princeton Combustion Research  
Laboratory, Inc.  
ATTN: M. Summerfield  
475 U.S. Highway One  
Monmouth Junction, NJ 08852-9650

No. of  
Copies Organization

- 2 Rockwell International  
Rocketdyne Division  
ATTN: BA08,  
J.E. Flanagan  
J. Gray  
6633 Canoga Ave.  
Canoga Park, CA 91303-2703
- 1 Thiokol Corporation  
Huntsville Division  
ATTN: Technical Library  
Huntsville, AL 35807
- 1 Sverdrup Technology, Inc.  
ATTN: Dr. John Deur  
2001 Aerospace Parkway  
Brook Park, OH 44142
- 2 Thiokol Corporation  
Elkton Division  
ATTN: R. Biddle  
Technical Library  
P.O. Box 241  
Elkton, MD 21921-0241
- 1 Veritay Technology, Inc.  
ATTN: E. Fisher  
4845 Millersport Highway  
East Amherst, NY 14501-0305
- 1 Universal Propulsion Company  
ATTN: H. J. McSpadden  
Black Canyon Stage 1  
Box 1140  
Phoenix, AZ 84029
- 1 Battelle  
ATTN: TACTEC Library, J.N. Huggins  
505 King Ave.  
Columbus, OH 43201-2693
- 1 Brigham Young University  
Department of Chemical Engineering  
ATTN: M. Beckstead  
Provo, UT 84601

No. of  
Copies Organization

- 1 California Institute of Technology  
204 Karman Laboratory  
Main Stop 301-46  
ATTN: F.E.C. Culick  
1201 E. California Street  
Pasadena, CA 91109
- 1 California Institute of Technology  
Jet Propulsion Laboratory  
ATTN: L. D. Strand, MS 512/102  
4800 Oak Grove Drive  
Pasadena, CA 91109-8099
- 1 University of Illinois  
Department of Mechanical/Industrial  
Engineering  
ATTN: H. Krier  
144 MEB; 1206 N. Green Street  
Urbana, IL 61801-2978
- 1 University of Massachusetts  
Department of Mechanical Engineering  
ATTN: K. Jakus  
Amherst, MA 01002-0014
- 1 University of Minnesota  
Department of Mechanical Engineering  
ATTN: E. Fletcher  
Minneapolis, MN 55414-3368
- 3 Georgia Institute of Technology  
School of Aerospace Engineering  
ATTN: B.T. Zinn  
E. Price  
W.C. Strahle  
Atlanta, GA 30332
- 1 Institute of Gas Technology  
ATTN: D. Gidaspo  
3424 S. State Street  
Chicago, IL 60616-3896
- 1 Johns Hopkins University  
Applied Physics Laboratory  
Chemical Propulsion  
Information Agency  
ATTN: T. Christian  
Johns Hopkins Road  
Laurel, MD 20707-0690

No. of  
Copies Organization

- 1 Massachusetts Institute of Technology  
Department of Mechanical Engineering  
ATTN: T. Toong  
77 Massachusetts Ave.  
Cambridge, MA 02139-4307
- 1 Pennsylvania State University  
Applied Research Laboratory  
ATTN: G. M. Faeth  
University Park, PA 16802-7501
- 1 Pennsylvania State University  
Department of Mechanical Engineering  
ATTN: K. Kuo  
University Park, PA 16802-7501
- 1 Purdue University  
School of Mechanical Engineering  
ATTN: J. R. Osborn  
TSPC Chaffee Hall  
West Lafayette, IN 47907-1199
- 1 SRI International  
Propulsion Sciences Division  
ATTN: Technical Library  
333 Ravenwood Ave.  
Menlo Park, CA 94025-3493
- 1 Rensselaer Polytechnic Institute  
Department of Mathematics  
Troy, NY 12181
- 2 Director  
Los Alamos Scientific Laboratory  
ATTN: T3, D. Butler  
M. Division, B. Craig  
P.O. Box 1663  
Los Alamos, NM 87544
- 1 General Applied Sciences Laboratory  
ATTN: J. Erdos  
77 Raynor Ave.  
Ronkonkoma, NY 11779-6649
- 1 Battelle PNL  
ATTN: Mr. Mark Garnich  
P.O. Box 999  
Richland, WA 99352

No. of  
Copies Organization

- 1 Stevens Institute of Technology  
Davidson Laboratory  
ATTN: R. McAlevy, III  
Castle Point Station  
Hoboken, NJ 07030-5907
- 1 Rutgers University  
Department of Mechanical and  
Aerospace Engineering  
ATTN: S. Temkin  
University Heights Campus  
New Brunswick, NJ 08903
- 1 University of Southern California  
Mechanical Engineering Department  
ATTN: OHE200, M. Gerstein  
Los Angeles, CA 90089-5199
- 2 University of Utah  
Department of Chemical Engineering  
ATTN: A. Baer  
G. Flandro  
Salt Lake City, UT 84112-1194
- 1 Washington State University  
Department of Mechanical Engineering  
ATTN: C. T. Crowe  
Pullman, WA 99163-5201
- 1 Alliant Techsystems, Inc.  
ATTN: R. E. Tompkins  
MN38-3300  
5700 Smetana Drive  
Minnetonka, MN 55343
- 1 Science Applications, Inc.  
ATTN: R. B. Edelman  
23146 Cumorah Crest Drive  
Woodland Hills, CA 91364-3710
- 1 Battelle Columbus Laboratories  
ATTN: Mr. Victor Levin  
505 King Ave.  
Columbus, OH 43201-2693

No. of  
Copies Organization

- 1 Allegheny Ballistics Laboratory  
Propulsion Technology Department  
Hercules Aerospace Company  
ATTN: Mr. Thomas F. Farabaugh  
P.O. Box 210  
Rocket Center, WV 26726
- 1 MBR Research Inc.  
ATTN: Dr. Moshe Ben-Reuven  
601 Ewing St., Suite C-22  
Princeton, NJ 08540
- 1 Commander  
Defense Advanced Research Projects Agency  
ATTN: MAJ R. Lundberg  
1400 Wilson Blvd.  
Arlington, VA 22209
- 1 U.S. Army Space Technology and Research  
Office  
ATTN: COL D. S. Jackson  
5321 Riggs Road  
Gaithersburg, MD 20882
- 1 AFOSR/NA  
ATTN: Dr. J. Tishkoff  
Bolling AFB, DC 20332-6448
- 1 Director  
NASA Langley Research Center  
ATTN: Technical Library  
Langley Station  
Hampton, VA 23665
- 2 Director  
NASA Langley Research Center  
ATTN: Mail Stop 408,  
W. Scallion  
R. Witcofski  
Langley Station  
Hampton, VA 23665
- 1 Director  
Sandia National Laboratories  
ATTN: W. Oberkamp  
Division 1636  
Albuquerque, NM 87185

No. of  
Copies Organization

- 1 Advanced Projects Research, Inc.  
ATTN: Dr. J. Humphrey  
Suite A  
5301 N. Commerce Ave.  
Moorpark, CA 93021
- 1 Aerospace Corporation  
Aero-Engineering Subdivision  
ATTN: Walter F. Reddall  
El Segundo, CA 92045
- 2 Olin Rocket Research Company  
ATTN: A. Harvey  
11441 Willows Road, NE  
P.O. Box 97009  
Redmond, WA 98073-9709
- 4 Naval Research Laboratory  
ATTN: Dr. K. Keilasanath  
Dr. C. Li  
Dr. J. Boris  
Dr. E. Oran  
Washington, DC 20375-5000
- 1 Amtec Engineering, Inc.  
P.O. Box 3633  
Bellevue, WA 98009-3633
- Aberdeen Proving Ground
- 1 Cdr, CSTA  
ATTN: STECS-PO, R. Hendricksen



No. of  
Copies Organization

2 Institut Saint-Louis  
ATTN: Dr. F. Seiler  
Dr. Smeets  
F 68301 Saint-Louis Cedex  
12 rue de l'industrie, B.P. 301  
France

INTENTIONALLY LEFT BLANK.

## USER EVALUATION SHEET/CHANGE OF ADDRESS

This laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers below will aid us in our efforts.

1. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

2. How, specifically, is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

3. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

4. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

BRL Report Number BRL-TR-3257 Division Symbol \_\_\_\_\_

Check here if desire to be removed from distribution list. \_\_\_\_\_

Check here for address change. \_\_\_\_\_

Current address:      Organization \_\_\_\_\_  
   Address \_\_\_\_\_  
   \_\_\_\_\_

### DEPARTMENT OF THE ARMY

Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T  
Aberdeen Proving Ground, MD 21005-5066

OFFICIAL BUSINESS

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT No 0001, APG, MD

Postage will be paid by addressee

Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T  
Aberdeen Proving Ground, MD 21005-5066

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES